


Product Features and Specifications

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS.
- Two 3/4" MPT condensate drains.
- Powder-painted metal drain pan. Stainless available.
- Bi-directional airflow.
- Flowrater standard. Factory or field-installable TXV available.
- Immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinet fully lined with 1/2" faced insulation.
- Rifled copper tubing, enhanced aluminum fins.
- AHRI certifiable with all brands of A/C and heat pump systems (BHA only).
- ETL listed.
- Five-year warranty. For complete warranty details, please visit www.AspenMfg.com

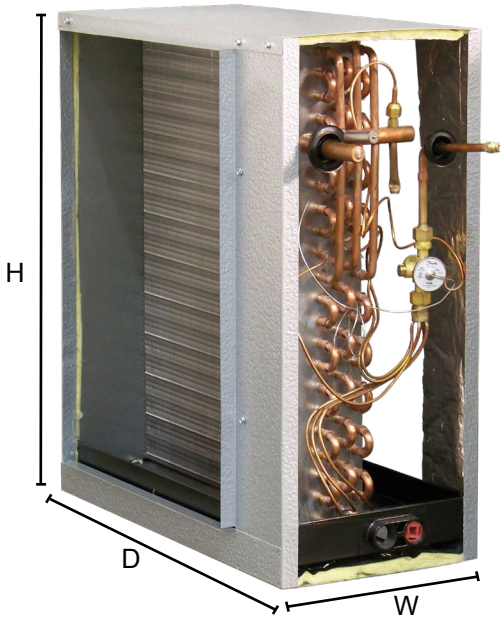

Representative drawing only. Some models may vary in appearance.

COIL MODEL	DIMENSIONS			
	HEIGHT	OPENING		LENGTH
	B"	C"	D"	E"
HIGH HORIZONTAL				
BHA** 24	23-1/2	21	16	21-1/2
BHA** 36	23-1/2	21	24	29-1/2
BHA** 48	23-1/2	21	29	34-1/2
BHA** 60	25	21	29	34-1/2
LOW HORIZONTAL				
BHL** 24	17	14-1/2	21-1/2	27
BHL** 36	17	14-1/2	21-1/2	27
BHL** 48	17	14-1/2	29	36
BHL** 60	21	18-1/2	29	36

BHAL Spec-2024-09-V002

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation.