


### Product Features and Specifications

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS.
- Two 3/4" MPT condensate drains.
- Powder-painted metal drain pan. Stainless available.
- Bi-directional airflow.
- Flowrater standard. Factory or field-installable TXV available.
- Immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinet fully lined with 1/2" faced insulation.
- Rifled copper tubing, enhanced aluminum fins.
- AHRI certifiable with all brands of A/C and heat pump systems (BHA only).
- ETL listed.
- Five-year warranty. For complete warranty details, please visit [www.AspenMfg.com](http://www.AspenMfg.com)

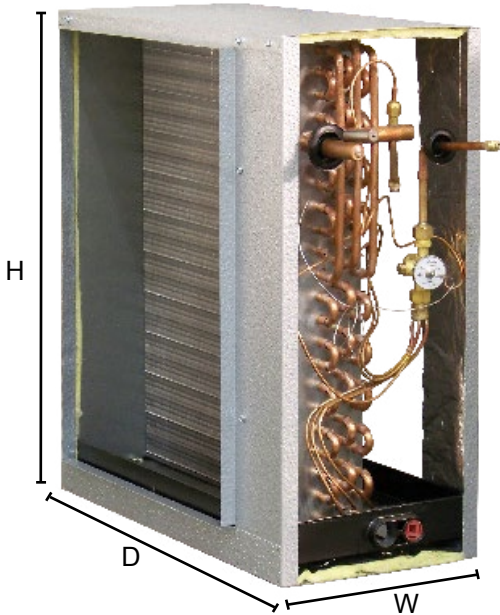

Representative drawing only. Some models may vary in appearance.

COIL MODEL	DIMENSIONS			
	HEIGHT	OPENING		LENGTH
	B"	C"	D"	E"
<b>HIGH HORIZONTAL</b>				
BHA** 24	23-1/2	21	16	21-1/2
BHA** 36			24	29-1/2
BHA** 48			29	34-1/2
BHA** 60	25			
<b>LOW HORIZONTAL</b>				
BHL** 24	17	14-1/2	21-1/2	27
BHL** 36			29	36
BHL** 48	21	18-1/2		
BHL** 60				

DRAIN PAN TEMPERATURE TABLE	
DRAIN PAN TYPE	TEMP LIMITS
Plastic - Standard	290°
Plastic - High Temp	425°
Metal - High Temp	600°