



Unit shown with service panels removed. Representative drawing only. Some models may vary in appearance.



For complete warranty details visit
www.AspenMfg.com

FEATURES AND BENEFITS:

Application Versatility

Upflow or horizontal right as shipped (field-convertible for downflow or horizontal left applications). Can be AHRI certified with most brands of air conditioners or heat pumps. ETL listed for use with either R22 or R410A when a proper metering device is used.

Low Leakage Cabinet

Less than 2% air leakage from cabinet when tested in accordance with ASHRAE standard 193. Unit must be installed according to installation instructions. Sturdy, fully insulated galvanized steel cabinet with knockout for duct return.

Air Moving System

Direct drive blowers circulate air quietly and efficiently. Threespeed motors allow for precise air volume selection. Rail mounted blowers provide easy removal for service and maintenance.

Electronic Control Board

An electronic board controls the functioning of the system reducing moving parts. The board provides a blower time delay to maximize heat/cool extraction and offers an integrated fuse for additional protection.

All Aluminum Coil

High efficiency rifled aluminum tubes and enhanced aluminum fins provide maximum heat transfer. All coils factory leak tested with two-stage pressure decay and mass spectrometer process then nitrogen pressurized and factory sealed for maximum reliability. Available with either factory installed orifice or TXV metering device. Field-installable bolt-on TXVs are also available. Access door allows for easy coil cleaning.

Options

See Options menu.

SPECIFICATIONS & PERFORMANCE:

HEATING AND COOLING PERFORMANCE AND ELECTRICAL DATA											
MODEL	ELECTRIC HEAT KIT MODEL	PERFORMANCE DATA						ELECTRICAL DATA			
		HEATING (kW)		HEAT KIT ONLY AMPS		HEATING CAPACITY (MBTUH)		MINIMUM CIRCUIT AMPACITY (MCA)		MAX BREAKER OR FUSE SIZE	
		208V	240V	208V	240V	208V	240V	208V	240V	208V	240V
LAM24/25/26	E(C,T)S00	0.0	0.0	0.0	0.0	0.0	0.0	2.3	2.3	15	15
	E(C,T)S03	2.3	3.0	11.1	12.5	7.8	10.2	15.8	17.9	20	20
	E(C,T)S05	3.8	5.0	18.3	20.8	13.0	17.1	23.9	27.3	25	30
	E(C,T)S08	6.1	8.0	29.3	33.3	20.8	27.3	38.3	43.9	40	45
	E(C,T)S10	7.6	10.0	36.5	41.7	25.9	34.1	45.5	52.3	50	60
LAM30/31/32	E(C,T)S00	0.0	0.0	0.0	0.0	0.0	0.0	3.3	3.3	15	15
	E(C,T)S03	2.3	3.0	11.1	12.5	7.8	10.2	16.8	18.9	20	25
	E(C,T)S05	3.8	5.0	18.3	20.8	13.0	17.1	24.9	28.3	30	30
	E(C,T)S08	6.1	8.0	29.3	33.3	20.8	27.3	39.3	44.9	45	50
	E(C,T)S10	7.6	10.0	36.5	41.7	25.0	34.1	46.6	53.3	50	60
	E(C,T)S15	11.3	15.0	54.3	62.5	38.6	51.2	46.5 / 21.6	53.3 / 25	50 / 25	60 / 25
LAM36/37/38	E(C,T)S00	0.0	0.0	0.0	0.0	0.0	0.0	3.3	3.3	15	15
	E(C,T)S03	2.3	3.0	11.1	12.5	7.8	10.2	16.8	18.9	20	25
	E(C,T)S05	3.8	5.0	18.3	20.8	13.0	17.1	24.9	28.3	30	30
	E(C,T)S08	6.1	8.0	29.3	33.3	20.8	27.3	39.3	44.9	45	50
	E(C,T)S10	7.6	10.0	36.5	41.7	25.0	34.1	46.6	53.3	50	60
	E(C,T)S15	11.3	15.0	54.3	62.5	38.6	51.2	46.5 / 21.6	53.3 / 25	50 / 25	60 / 25
LAM42/43	F(C,T)L00	0.0	0.0	0.0	0.0	0.0	0.0	5.5	5.5	15	15
	E(C,T)L05	3.8	5.0	18.3	20.8	13.0	17.1	27.1	30.5	30	35
	E(C,T)L10	7.6	10.0	36.5	41.7	25.9	34.1	48.8	55.5	50	60
	E(C,T)L15	11.3	15.0	54.3	62.5	38.6	51.2	48.8 / 21.6	55.5 / 25	50 / 25	60 / 25
	E(C,T)L20	15.0	20.0	72.1	83.3	51.2	68.3	48.8 / 43.3	55.5 / 50	50 / 45	60 / 50
	E(C,T)L25	18.8	25.0	90.4	104.2	64.2	85.3	48.8 / 43.3 / 21.6	59.5 / 50 / 25	50 / 45 / 25	60 / 50 / 50
LAM48/49	F(C,T)L00	0.0	0.0	0.0	0.0	0.0	0.0	5.5	5.5	15	15
	E(C,T)L05	3.8	5.0	18.3	20.8	13.0	17.1	27.1	30.5	30	35
	E(C,T)L10	7.6	10.0	36.5	41.7	25.9	34.1	48.8	55.5	50	60
	E(C,T)L15	11.3	15.0	54.3	62.5	38.6	51.2	48.8 / 21.6	55.5 / 25	50 / 25	60 / 25
	E(C,T)L20	15.0	20.0	72.1	83.3	51.2	68.3	48.8 / 43.3	55.5 / 50	50 / 45	60 / 50
	E(C,T)L25	18.8	25.0	90.4	104.2	64.2	85.3	48.8 / 43.3 / 21.6	59.5 / 50 / 25	50 / 45 / 25	60 / 50 / 25
LAM60/61/62	F(C,T)L00	0.0	0.0	0.0	0.0	0.0	0.0	5.5	5.5	15	15
	E(C,T)L05	3.8	5.0	18.3	20.8	13.0	17.1	27.1	30.5	30	35
	E(C,T)L10	7.6	10.0	36.5	41.7	25.9	34.1	48.8	55.5	50	60
	E(C,T)L15	11.3	15.0	54.3	62.5	38.6	51.2	48.8 / 21.6	55.5 / 25	50 / 25	60 / 25
	E(C,T)L20	15.0	20.0	72.1	83.3	51.2	68.3	48.8 / 43.3	55.5 / 50	50 / 45	60 / 50
	E(C,T)L25	18.8	25.0	90.4	104.2	64.2	85.3	48.8 / 43.3 / 21.6	59.5 / 50 / 25	50 / 45 / 25	60 / 50 / 25

AIR HANDLER CHASSIS NOMENCLATURE				
LAM	18	D	G	000
LAM = 240V PSC Multi-Position Air Handler	NOMINAL TONNAGE (MBTUH)	D= Coil size (slab size, depth, rows)	METERING DEVICE 4 = non-bleed A/C or H/P R410 TXV 6=20% bleed A/C or H/P R410 TXV B = 20% bleed A/C or H/P R22 TXV F = R-22 Flo-rater G = R410 Flo-rater X = non-bleed A/C or H/P R22 TXV	OPTION CODE

LAM AHU Spec-2024-11-V001

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation.

ELECTRIC HEAT KIT NOMENCLATURE			
E	C	S	03
N = ELECTRIC HEAT	Interruption C = Circuit Breaker T = Terminal Block	S = 24-38 L = 42-62	Heat Strip 00 = 0 KW 03 = 3 KW 05 = 5 KW *06 = 6 KW 08 = 8 KW 10 = 10 KW* 15 = 15 KW 20 = 20 KW 25 = 25 KW

BLOWER DATA									
MODEL	MOTOR				CFM V EXTERNAL STATIC*				
	MOTOR SPEED	HP	AMPS	VOLTAGE	0.1	0.2	0.3	0.4	0.5
LAM 24/25/26	LOW	1/5	1.8	240	835	800	790	750	695
	HIGH				915	880	875	825	770
LAM 30/31/32/36/37/38	LOW	1/3	2.6	240	1130	1100	1050	1000	960
	HIGH				1410	1350	1280	1200	1160
LAM 42/43/48/49/60/61/62	LOW	3/4	4.4	240	1520	1500	1485	1460	1440
	MID				1700	1675	1640	1620	1575
	HIGH				2060	2020	1980	1935	1885





ASK FOR ASPEN



LAM AHU Spec-2024-11-V001

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation.

LEM DIMENSIONS												
Model	A	B	C	D	E	F	G	J	K	FILTER SIZE	SHIPPING WEIGHT	SKID QTY
LAM24/25+E*	21 [533]	40 [1016]	20-1/2 [521]	18-3/4 [476]	12 [305]	8-1/4 [209]	12-1/4 [311]	18-1/2 [470]	18-1/2 [470]	16X20	100	4
LAM30+E*	21 [533]	49-1/4 [1251]	20-1/2 [521]	18-3/4 [476]	12 [305]	8-1/4 [209]	14-1/4 [362]	18-1/2 [470]	18-1/2 [470]	16X20	118	4
LAM26/32/36/38+E*	21 [533]	49-1/4 [1251]	20-1/2 [521]	18-3/4 [476]	12 [305]	10-1/4 [260]	16-1/4 [412]	18-1/2 [470]	18-1/2 [470]	16X20	118	4
LAM42+E*	24-1/2 [622]	57 [1448]	20-1/2 [521]	22-1/4 [565]	14-3/4 [375]	11 [279]	16 [406]	22 [559]	18-1/2 [470]	20X20	153	4
LAM48+E*	24-1/2 [622]	57 [1448]	20-1/2 [521]	22-1/4 [565]	14-3/4 [375]	13 [330]	18 [457]	22 [559]	18-1/2 [470]	20X20	180	4
LAM43/49/60/62+E*	24-1/2 [622]	57 [1448]	20-1/2 [521]	22-1/4 [565]	14-3/4 [375]	13 [330]	18 [457]	22 [559]	18-1/2 [470]	20X20	180	4
LAM61+E*	24-1/2 [622]	57 [1448]	20-1/2 [521]	22-1/4 [565]	14-3/4 [375]	15 [381]	20 [508]	22 [559]	18-1/2 [470]	20X20	200	4



VIEW H-H

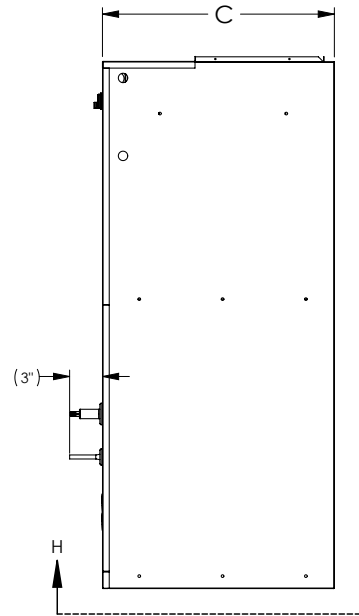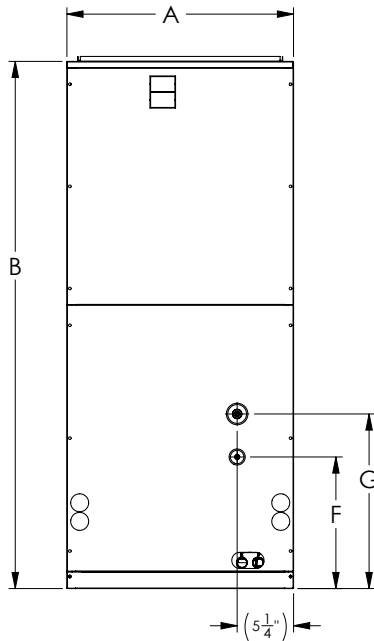

LAM AHU Spec-2024-11-V001

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation.