

Product Features and Specifications


- Rifled copper tubing, enhanced aluminum fins.
- Immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Left or right-hand refrigerant and plumbing connections.
- Liquid line - 3/8" ODS, suction line - 3/4" ODS on 1-1/2 3 ton and 7/8" ODS on 3-1/2 - 5 ton.
- Externally mounted flowrate body with Schrader valve for hiss-testing
- Heavy duty plastic drain pans on most models.
- Upflow without field modification. Downflow applications require plate kit, sold separately.
- AHRI certifiable with all brands of A/C and heat pump systems.
- ETL listed for use with R-22, R-410A, R-454A, and R-32 when proper metering device is used.
- Ten-year limited warranty. For complete warranty details, please visit www.AspenMfg.com

Customization

- Factory or field-installed TXV available.
- Powder-painted metal or stainless pans.
- Schrader mounted on suction manifold, external to cabinet.

Downflow Kit Part Numbers

- **METAL DRAIN PANS** 16" DWNFLWM-16 & 18" DWNFLWM-18
- **PLASTIC DRAIN PANS** DWNFLWP

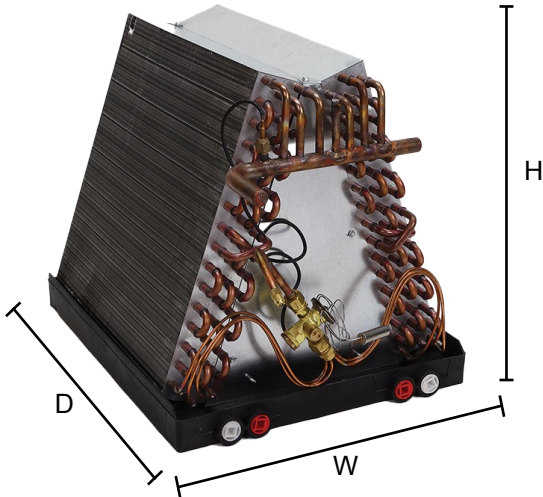

Representative image only. Some models may vary in appearance. Due to continuous product improvement, specifications are subject to change without notice.

COIL MODEL	NOMINAL CAPACITY (BTUs)	DIMENSIONS						SHIPPING INFORMATION				
		PAN WIDTHS (W)"				PAN DEPTH (D)"	BARE SLAB HEIGHT (H)"	SHIPPING WEIGHT (LBS)			SKID QTY	
		13	16	19-1/2	23			2 ROW	3 ROW	4 ROW		
CA24A*	24,000	13	16	19-1/2	23	19-3/8	13-1/2	17	27	35	30	
CA24B*							15-1/2	20	31	41	25	
CA24C*							17-1/2	23	36	47	25	
CA24D*							19-1/2	25	40	53	20	
CA30A*	30,000	13	16	19-1/2	23	19-3/8	15-1/2	20	31	41	25	
CA30B*							17-1/2	23	36	47	25	
CA30C*							19-1/2	25	40	53	20	
CA30D*							21-1/2	28	45	58	16	
CA30E*							21-1/2	30	47	60	16	
CA36A*	36,000	N/A	16	19-1/2	23	19-3/8	17-1/2	23	36	47	25	
CA36B*							13 for 2, 3R; 16 for 4R	19-1/2	25	40	53	20
CA36C*							13 for 2, 3R; 16 for 4R	21-1/2	28	45	58	16
CA36D*							13 for 2, 3R; 16 for 4R	23-1/2	31	49	64	12
CA42A*	42,000	N/A	16	19-1/2	23	19-3/8	25-1/2	25	40	53	20	
CA42B*							21-1/2	28	45	58	16	
CA42C*							23-1/2	31	49	64	12	
CA42D*							25-1/2	34	54	70	12	
CA48A*	48,000	N/A	16	19-1/2	23	19-3/8	21-1/2	28	45	58	16	
CA48B*							23-1/2	31	49	64	12	
CA48C*							25-1/2	34	54	70	12	
CA48D*							27-1/2	37	58	76	12	
CA48F*							25-1/2	36	56	72	12	
CA48G*							27-1/2	39	60	78	12	
CA60A*	60,000	N/A	N/A	19-1/2 (2)	23 (2)	21-3/4	25-1/2	34	54	70	12	
CA60B*							27-1/2	37	58	76	12	
CA60C*							24-1/2	38	60	79	12	
CA60D*							26-1/2	41	65	86	12	
CA60E*							N/A	46	73	95	12	
CA60F*							19-1/2	41	62	80	12	
CA60G*	N/A	48	75	97	12							

CA Spec-2024-11-V002

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation.

DRAIN PAN TEMPERATURE TABLE	
DRAIN PAN TYPE	TEMP LIMITS
Plastic - Standard	290°
Plastic - High Temp	425°
Metal - High Temp	600°