

Product Features and Specifications

- Rifled aluminum tubing, enhanced aluminum fins.
- Air pressure tested at 500 psi, leak tested with helium, then sealed and nitrogen pressurized.
- Liquid line - 3/8" OD, suction line - 1/4" OD on 1-1/2- 3 ton and 7/8" OD on 3-1/2 - 5 ton.
- Refrigerant lines exit from the top of the coil with Schrader valve for hiss-testing.
- Three-piece access doors on top of the coil for easy service.
- Fully insulated cabinet with plenum sides and back constructed of foil-backed, faced, one-inch thick, fiberglass duct board.
- Heavy duty plastic pan with 4-3/4" NPT condensate drains on each side of the coil.
- Secondary metal drain pan included with one inch spacing around the cabinet for turnkey installation.
- AHRI certifiable with all brands of A/C and heat pump systems.
- ETL listed for use with R-22, R-410A, R-454A, and R-32 when proper metering device is used.
- Ten-year limited warranty with registration. For complete warranty details, please visit www.AspenMfg.com


Representative image only. Some models may vary in appearance. Due to continuous product improvement, specifications are subject to change without notice.

COIL MODEL	NOMINAL CAPACITY (BTUs)	DIMENSIONS					SHIPPING INFORMATION						
		CABINET			RETURN OPENING (HEIGHT X WIDTH)	AUX PAN DEPTH X WIDTH	SHIPPING WEIGHT (LBS)		SKID QTY				
		WIDTH (W")	DEPTH (D")	APPLICABLE HEIGHT RANGE (H")			3 ROW	4 ROW					
DP25A*	25,000	21	28	14-1/2	13-1/2 X 20	30 X 23	37	41	16				
DP25B*				15	14 X 20		39	44					
DP25E*				17-1/2	16-1/2 X 20		52	59					
DP31A*	31,000			15	14 X 20		39	44					
DP31E*				17-1/2	16-1/2 X 20		52	59					
DP37A*				37,000	15		14 X 20	39		44			
DP37B*	17-1/2				16-1/2 X 20		49	55					
DP37C*							43	49					
DP37D*	37,000			33	21		20 X 20	35 X 23		68	77	6	
DP37E*			28	17-1/2	16-1/2 X 20	30 X 23	58	67		12			
DP37F*							40	47		16			
DP43C*	43,000		33	21	20 X 20	35 X 23	60	69		12			
DP43D*		67					76	6					
DP49A*		49,000					28	17-1/2	30 X 23	51	58	16	
DP49B*	33		21	20 X 20	35 X 23	58				66	12		
DP49C*						67							
DP49D*	49,000	33	21	20 X 20	35 X 23	68	77	6					
DP61A*						61,000	28		24-1/2	23-1/2 X 20	30 X 23	60	69
DP61B*												33	25
DP61C*	79	92											
DP61D*	61,000	33	25	24 X 20	35 X 23	81	93	6					
DP61E*						83	97						
DP61F*						28	24-1/2		23-1/2 X 20	53	60		

DP Spec-2024-11-V002

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation.

DP SERIES DIMENSIONAL DIAGRAM

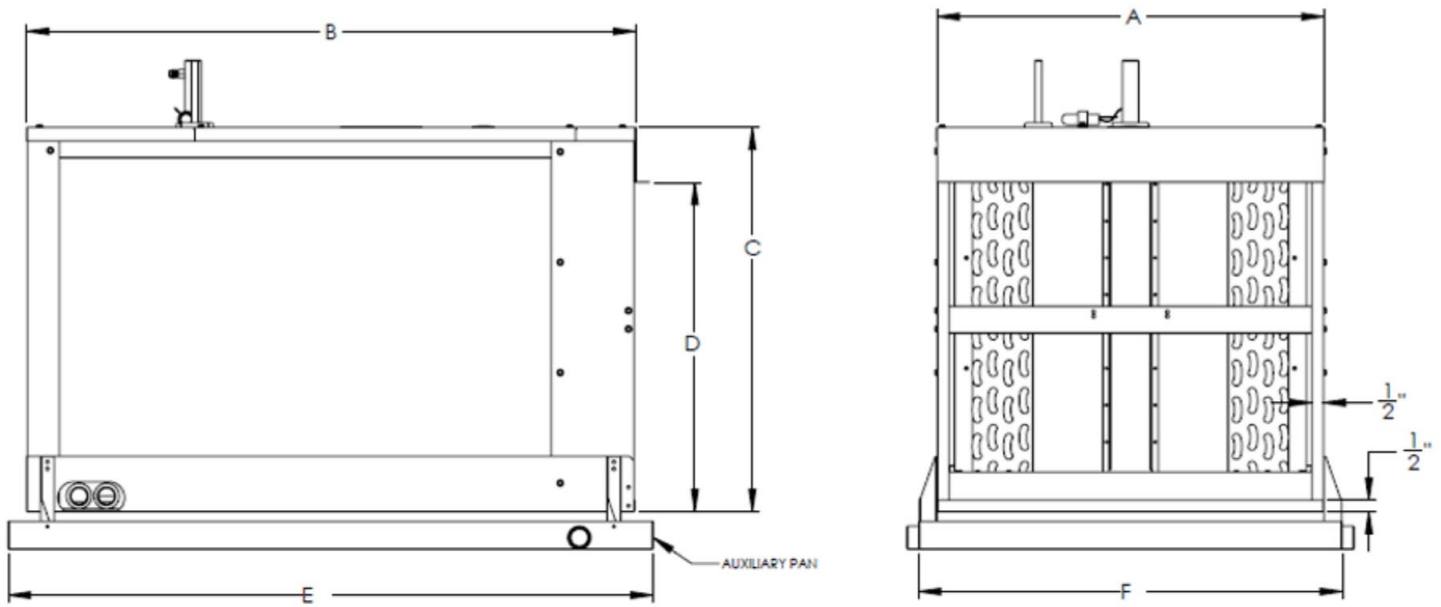

DRAIN PAN TEMPERATURE TABLE

DRAIN PAN TYPE	TEMP LIMITS
Plastic - Standard	290°
Plastic - High Temp	425°
Metal - High Temp	600°

DP Spec-2024-11-V002

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation.